

- 1** Soporte para acoplar el visor
- 2** Brackets para acoplar el soporte al casco
- 3** Aro de aluminio

Acoplable a cascos

Descripción

- Protector facial verde 2.5 con aro de aluminio, para acoplar a cascos Safetop SV, SP y SR, ER & AR-Series.
- Incluye el visor 2.5, el soporte y los brackets.
- Se puede colocar en posición de visera.
- Se estabiliza perfectamente en la cabeza del operario, pudiéndose abatir sin perder su posición
- Protección contra partículas a gran velocidad. Resistencia impacto medio de energía (120 m/s).
- Extremos de temperaturas (-5° a +55°C).
- Protección contra salpicaduras de líquidos.
- Clase óptica 1: válida para largos períodos de uso.
- Dimensiones del visor: 20x40 cm x 1 mm de grosor.
- Visor 2.5.
- Clase óptica 1: válido para largos períodos de uso.

Materiales

- Visor de policarbonato. Aro de aluminio

Aplicaciones

- **B-** Protección contra partículas a gran velocidad
Impacto medio de energía (bala de 6 mm a 120 m/s)
EN170- Protección contra rayos UV
Escala del **ocular 2-5**.
- T** - Extremos de temperaturas
- 3** - Contra salpicaduras de líquidos

Embalaje

- 1 ud / cajas de 50 uds

REPUESTOS SUPERFACE COMBI GREEN (por ud)

SOPORTE	Ref. 79745
BRACKET	Ref. 79746
VISOR 2.5	Ref. 79355

+ CASCOS COMPATIBLES (no incluido)

* Disponibles en diferentes colores

SP-Series
Ref. 80610



SR-Series
Ref. 80520



SV-Series
Ref. 80620



AR-SafetySeries
Ref. 80540



ER-SafetySeries
Ref. 80530




STANDARDS

2-5 EN 166 1B T 3 (Protección individual de los ojos)



WWW.SAFETOP.NET



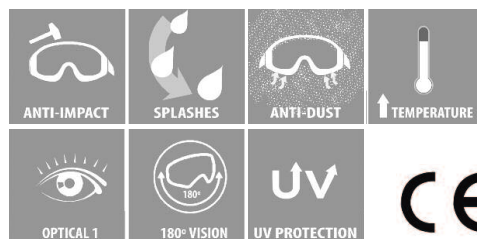

- 1** Carrier to fit the visor
- 2** Brackets to fit the carrier to the helmet
- 3** Aluminium bound

To fit **helmets**

Description

- ▶ Green face shield with 2.5 visor and aluminium bound.
- ▶ To be used with Safetop helmets: SV, SP, SR, AR and ER-Series.
- ▶ It includes the carrier and the brackets.
- ▶ Folding carrier.
- ▶ Protection against particles.
- ▶ Protection against liquid splashes and crop sprays.
- ▶ UV protection (EN 170).
- ▶ Optical class 1: valid for long periods of use.
- ▶ Visor dimensions: 20x40cm x 1mm thick

Materials

- ▶ Polycarbonate visor. Aluminium bound

Applications

- ▶ **B-** Protection against high speed particles. Medium energy impact (ball of 6 mm - 120 m/s)
EN170- UV protection.
- T** - High temperatures
- 3** - Against liquid splashes

Packaging

- ▶ 1 pc / boxes of 50 pcs

SPARE PARTS SUPERFACE COMBI GREEN (pc)

CARRIER	Ref. 79745
BRACKET	Ref. 79746
VISOR 2.5	Ref. 79355

+ COMPATIBLE HELMETS (not included)

* Available in different colors

SP-Series
Ref. 80610



SR-Series
Ref. 80520



SV-Series
Ref. 80620



AR-SafetySeries
Ref. 80540



ER-SafetySeries
Ref. 80530



STANDARDS

2-5 EN 166 1B T 3 (Individual eye protection)



WWW.SAFETOP.NET

